

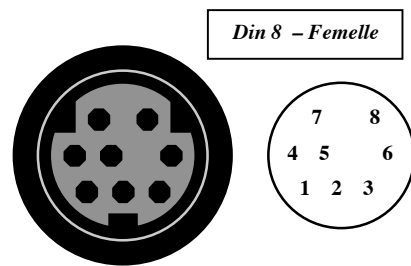
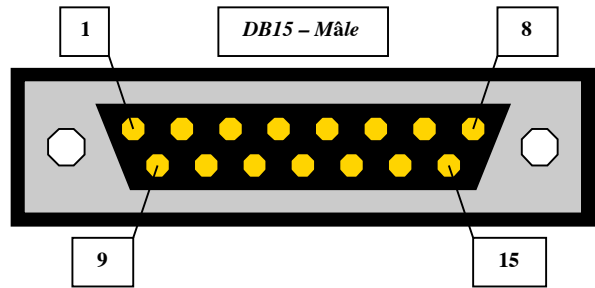


FOSTEX Foundation 2000RE \Leftrightarrow Télécommande 2000RE

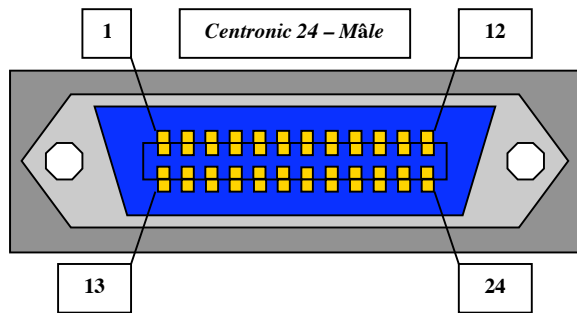

Centronic 24 - Mâle	DB15 - Mâle	Din 8 - Femelle	Commentaire
1	Masse Chassis	Masse Chassis	Blindage
2	-	2 & 3	Masse (Alim Ext)
3	-	-	
4	-	-	
5	10	-	
6	11	-	
7	2	-	
8	3	-	
9	4	-	
10	5	-	
11	12	-	
12	13	-	
13	9	-	+5V (UC)
14	1	-	Masse (UC)
15	-	-	
16	-	-	
17	-	-	
18	-	-	
19	-	-	
20	-	-	
21	-	5	+12V (Alim Ext)
22	-	4 & 7 & 8	+5V (Alim Ext)
23	-	-	
24	-	-	

FOSTEX Foundation 2000RE \Leftrightarrow Télécommande 2000

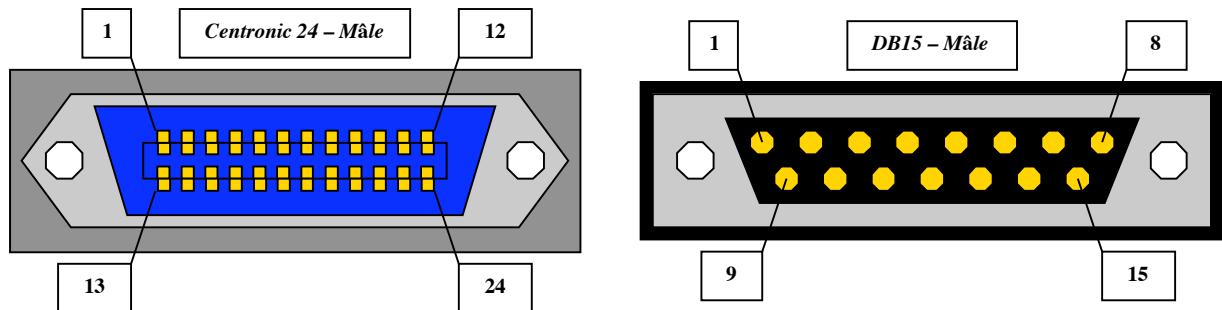

Centronic 24 - Mâle	DB15 - Mâle	Commentaire
1	Masse Chassis	Blindage
2	-	
3	7	+26V (UC)
4	8	Masse (UC)
5	10	
6	11	
7	2	
8	3	
9	4	
10	5	
11	12	
12	13	
13	-	
14	-	
15	7	+26V (UC)
16	8	Masse (UC)
17	-	
18	-	
19	-	
20	-	
21	-	
22	-	
23	-	
24	-	